

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN SLINGS (GRADE 80 PEERLESS CHAIN)

SPECIFICATIONS










PEER-ALLOY –Rugged, versatile, high strength, low weight chain manufactured from a special analysis alloy steel. Peer-Alloy has a comparatively high carbon content as well as containing various other alloying elements. The chain is quenched and tempered before the proof testing. The ultimate tensile strength of alloy chain is over twice that of ordinary steel chain. The chain is marked to identify grade and manufacturer. Grades 80 and 100 are the only chains recommended for use in over-head lifting applications.

Minimum elongation at break test 20%. Tensile strength following heat treatment meets or exceeds all existing OSHA, government, NSCM and ASTM specification requirements.

Chain Trade Size	Material Diameter (inches)		Nominal Inside Link Dimensions (inches)		Maximum Weight per 100 feet lbs.	Working Load Limit (Lbs.)
	Fraction	Decimal	Length	Width		
9/32"	9/32"	0.279	0.87	0.405	77	3,500
3/8"	13/32"	0.404	1.226	0.56	152	7,100
1/2"	17/32"	0.529	1.57	0.75	266	12,000
5/8"	5/8"	0.625	1.93	0.865	360	18,100
3/4"	3/4"	0.787	2.42	1.04	621	28,300
7/8"	7/8"	0.881	2.70	1.28	760	34,200
1"	1"	1.00	2.80	1.40	953	47,700
1-1/4"	1-1/4"	1.25	3.50	1.75	1537	72,300

*Caution: Working Load Limits should not be exceeded. Manufactures do not accept any liability for damages which may result from chain used in excess of working load limits.


WORKING LOAD LIMIT (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

Chain Trade Size	Single Branch sling (Lbs.)	Double Body sling (Lbs.)			Triple and Quad Branch Sling (Lbs.)		
							
9/32"	3,500	6,100	4,900	3,500	9,100	7,400	5,200
3/8"	7,100	12,300	10,000	7,100	18,400	15,100	10,600
1/2"	12,000	20,800	17,000	12,000	31,200	25,500	18,000
5/8"	18,100	31,300	25,600	18,100	47,000	38,400	27,100
3/4"	28,300	49,000	40,000	28,300	73,500	60,000	42,200
7/8"	34,200	59,200	48,400	34,200	88,900	72,500	51,300
1"	47,700	82,600	67,400	47,700	123,900	101,200	71,500
1-1/4"	72,300	125,200	102,200	72,300	187,800	153,400	108,400

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN SLINGS (GRADE 80 PEERLESS CHAIN)

SPECIFICATIONS

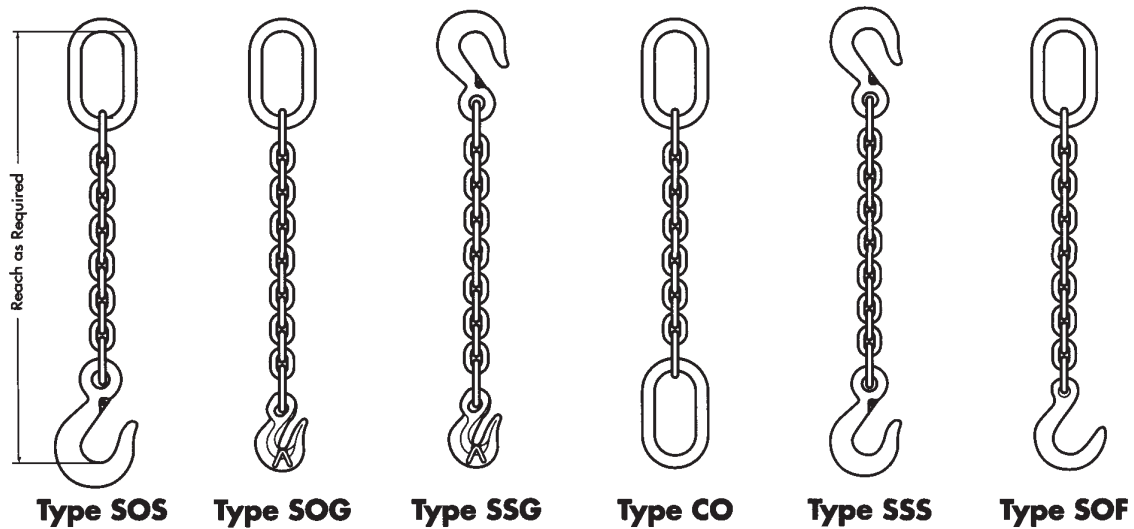

Chain Trade Size	Oblong Master Link	Sling Hook	Grab Hook	Foundry Hook
9/32"	1/2" x 2-3/4" x 4-23/32"	9/32"	9/32"	9/32"
3/8"	3/4" x 3-35/64" x 6-19/64"	3/8"	3/8"	3/8"
1/2"	1" x 4-21/64" x 7-7/8"	1/2"	1/2"	1/2"
5/8"	1" x 4-21/64" x 7-7/8"	5/8"	5/8"	5/8"
3/4"	1-1/4" x 5-1/8" x 9-1/16"	3/4"	3/4"	3/4"
7/8"	1-1/2" x 5-29/32" x 11-1/64"	7/8"	7/8"	7/8"
1"	1-3/4" x 7-3/32" x 13-25/32"	1"	1"	1"
1-1/4"	2" x 7-31/64" x 13-25/32"	1-1/4"	1-1/4"	1-1/4"


WORKING LOAD LIMIT (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

CHAIN TRADE SIZE	9/32"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
Working Load Limit (lbs.) 	3,500	7,100	12,000	18,100	28,300	34,200	47,700	72,300


CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN SLINGS (GRADE 80 PEERLESS CHAIN)


SPECIFICATIONS

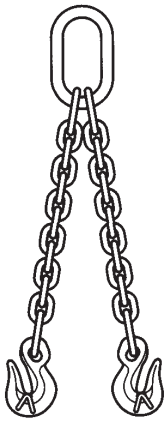

Type DOG

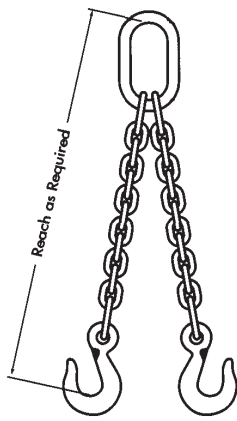

Type DOS

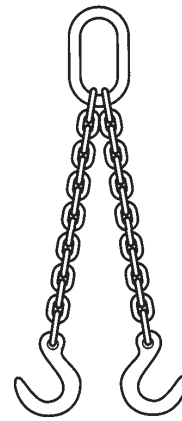

Type DOF

Chain Trade Size	Oblong Master Link	Sling Hook	Grab Hook	Foundry Hook
9/32"	1/2" x 2-3/4" x 4-23/32"	9/32"	9/32"	9/32"
3/8"	3/4" x 3-35/64" x 6-19/64"	3/8"	3/8"	3/8"
1/2"	1" x 4-21/64" x 7-7/8"	1/2"	1/2"	1/2"
5/8"	1-1/4" x 5-1/8" x 9-1/16"	5/8"	5/8"	5/8"
3/4"	1-1/2" x 5-29/32" x 11-1/64"	3/4"	3/4"	3/4"
7/8"	1-3/4" x 7-3/32" x 13-25/32"	7/8"	7/8"	7/8"
1"	2" x 7-31/64" x 13-25/32"	1"	1"	1"
1-1/4"	2-1/4" x 7-7/8" x 15-3/4"	1-1/4"	1-1/4"	1-1/4"


WORKING LOAD LIMIT (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

CHAIN TRADE SIZE	9/32"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
Working Load Limit (lbs.) 	6,100	12,300	20,800	31,300	49,000	59,200	82,600	125,200
Working Load Limit (lbs.) 	4,900	10,000	17,000	25,600	40,000	48,400	67,400	102,200
Working Load Limit (lbs.) 	3,500	7,100	12,000	18,100	28,300	34,200	47,700	72,300


CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN SLINGS (GRADE 80 PEERLESS CHAIN)

SPECIFICATIONS

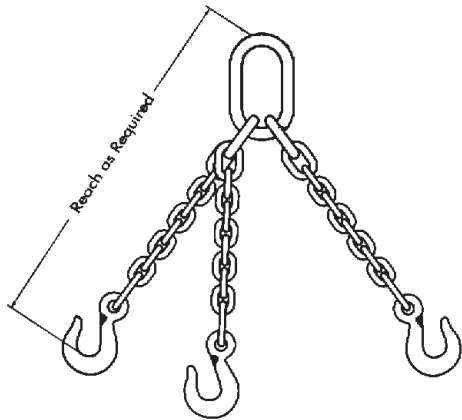

Type TOS

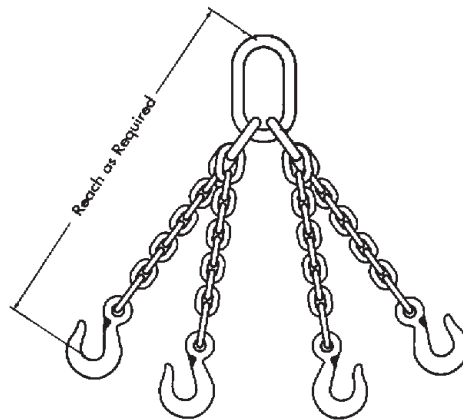

Type QOS

Chain Trade Size	Oblong Master Link Sub-Assembly	Sling Hook	Grab Hook	Foundry Hook
9/32"	3/4" x 3-3/4" x 6-19/64"	9/32"	9/32"	9/32"
3/8"	1" x 4-21/64" x 7-7/8"	3/8"	3/8"	3/8"
1/2"	1-1/4" x 5-1/8" x 9-1/16"	1/2"	1/2"	1/2"
5/8"	1-1/2" x 5-29/32" x 11-1/64"	5/8"	5/8"	5/8"
3/4"	1-3/4" x 7-31/64" x 13-25/32"	3/4"	3/4"	3/4"
7/8"	2" x 7-7/8" x 15-3/4"	7/8"	7/8"	7/8"
1"	2-1/4" x 7-3/4" x 15-1/2"	1"	1"	1"
1-1/4"	2-3/4" x 8-5/8" x 17-1/2"	1-1/4"	1-1/4"	1-1/4"


WORKING LOAD LIMIT (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

CHAIN TRADE SIZE	9/32"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
Working Load Limit (lbs.) 60°	9,100	18,400	31,200	47,000	73,500	88,900	123,900	187,800
Working Load Limit (lbs.) 45°	7,400	15,100	25,500	38,400	60,000	72,500	101,200	153,400
Working Load Limit (lbs.) 30°	5,200	10,600	18,000	27,100	42,200	51,300	71,500	108,400

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN SLINGS (GRADE 80 PEERLESS CHAIN)

SPECIFICATIONS

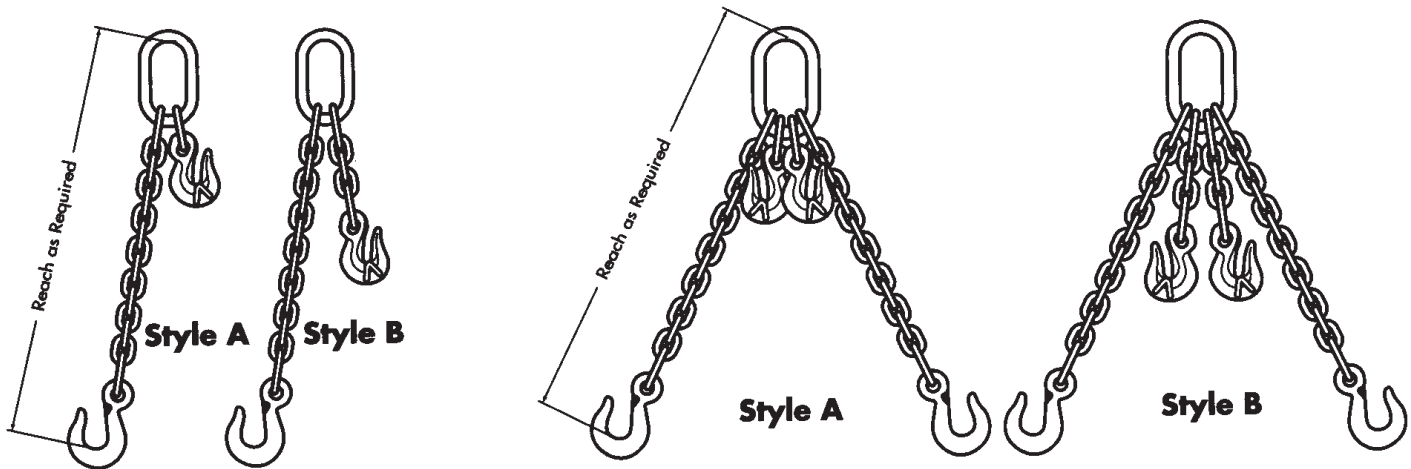

Chain Trade Size	Oblong Master Link For Single Leg Assembly	Oblong Master Link For Double Leg Assembly
9/32"	1/2" x 2-3/4" x 4-23/32"	1/2" x 2-3/4" x 4-23/32"
3/8"	3/4" x 3-35/64" x 6-19/64"	3/4" x 3-35/64" x 6-19/64"
1/2"	1" x 4-21/64" x 7-7/8"	1" x 4-21/64" x 7-7/8"
5/8"	1" x 4-21/64" x 7-7/8"	1-1/4" x 5-1/8" x 9-1/16"
3/4"	1-1/4" x 5-1/8" x 9-1/16"	1-1/2" x 5-29/32" x 11-1/64"
7/8"	1-1/2" x 5-29/32" x 11-1/64"	1-3/4" x 7-3/32" x 13-25/32"
1"	1-3/4" x 7-3/32" x 13-25/32"	2" x 7-31/64" x 13-25/32"
1-1/4"	2" x 7-31/64" x 13-25/32"	2-1/4" x 7-7/8" x 15-3/4"


WORKING LOAD LIMIT (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

CHAIN TRADE SIZE	9/32"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
Working Load Limit (lbs.) Single 	3,500	7,100	12,000	18,100	28,300	34,200	47,700	72,300
Working Load Limit (lbs.) Double 	6,100	12,300	20,800	31,300	49,000	59,200	82,600	125,200


CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN SLINGS (GRADE 80 PEERLESS CHAIN)

SPECIFICATIONS

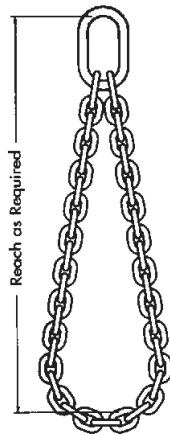

SINGLE BASKET

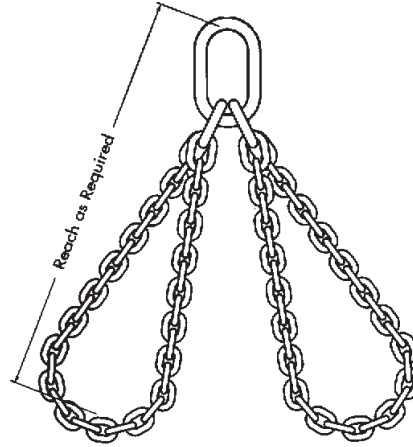

DOUBLE BASKET

Chain Trade Size	Oblong Master Link For Single Leg Assembly	Oblong Master Link For Double Leg Assembly
9/32"	1/2" x 2-3/4" x 4-23/32"	3/4" x 3-35/64" x 6-19/64"
3/8"	3/4" x 3-35/64" x 6-19/64"	1" x 4-21/64" x 7-7/8"
1/2"	1" x 4-21/64" x 7-7/8"	1-1/4" x 5-1/8" x 9-1/16"
5/8"	1-1/4" x 5-1/8" x 9-1/16"	1-1/2" x 5-29/32" x 11-1/64"
3/4"	1-1/2" x 5-29/32" x 11-1/64"	1-3/4" x 7-31/64" x 13-25/32"
7/8"	1-3/4" x 7-31/64" x 13-25/32"	2" x 7-7/8" x 15-3/4"
1"	2" x 7-31/64" x 13-25/32"	2-1/4" x 7-3/4" x 15-1/2"
1-1/4"	2-1/4" x 7-7/8" x 15-3/4"	2-3/4" x 8-5/8" x 17-1/2"


WORKING LOAD LIMIT (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

CHAIN TRADE SIZE	9/32"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"
Working Load Limit (lbs.) 	6,100	12,300	20,800	31,300	49,000	59,200	82,600	125,200
Working Load Limit (lbs.) 	9,100	18,400	31,200	47,000	73,500	88,900	123,900	187,800

CHAIN (Overhead Lifting)

METAL MESH SLINGS

SPECIFICATIONS (CAUTION: WORKING LOAD LIMIT SHOULD NOT BE EXCEEDED)

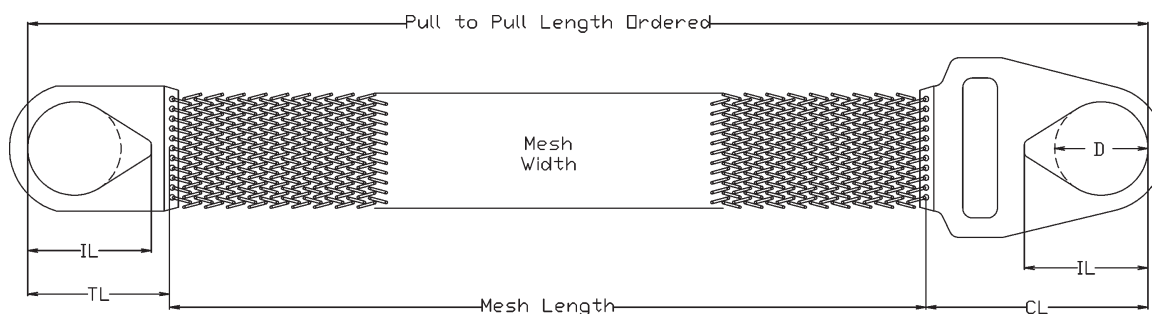


Mesh Type	Width of sling	Working Load Limit (lbs.)						
		Vertical	Choker	Basket	D	IL	TL	CL
G-35 Heavy Duty (10 Ga.)	2	2,300	2,300	4,600	2	3	3 7/8	5 5/8
	3	3,500	3,500	7,000	2 1/4	3 3/8	4 3/8	6 1/4
	4	4,800	4,800	9,600	3	4	5	6 3/4
	6	7,200	7,200	14,400	3 1/2	4 1/2	5 5/8	7 3/4
	8	9,600	9,600	19,200	4 1/2	6	7 1/2	9
	10	12,000	12,000	24,000	4 3/4	6 1/4	8	10 7/8
	12	14,400	14,400	28,800	5	6 1/2	8 5/8	11 3/8
	14	16,800	16,800	33,600	5	6 1/2	8 3/4	12 3/4
	16	19,200	19,200	38,400	5 1/4	7	9 1/8	14 1/4
18	21,600	21,600	43,200	5 1/2	7 1/2	9 3/4	15 3/4	
20	24,000	24,000	48,000	5 3/4	7 3/4	10 1/8	17	
G-43 Medium Duty (12 Ga.)	2	1,600	1,600	3,200	2	3	3 7/8	5 5/8
	3	2,400	2,400	4,800	2 1/4	3 3/8	4 3/8	6 1/4
	4	3,200	3,200	6,400	3	4	5	6 3/4
	6	4,800	4,800	9,600	3 1/2	4 1/2	5 5/8	7 3/4
	8	6,400	6,400	12,800	4 1/2	6	7 1/2	9
	10	8,000	8,000	16,000	4 3/4	6 1/4	8	10 7/8
	12	9,600	9,600	19,200	5	6 1/2	8 5/8	11 3/8
	14	Please Call (248) 588-1828						
	16							
18								
20								
20								

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 PEERLESS CHAIN)


ALLOY EYE CRADLE GRAB HOOK SPECIFICATIONS

Chain Size	A	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	25/64"	5/8"	2-23/64"	0.51	3,500	8027255
3/8"	33/64"	53/64"	3-5/32"	1.30	7,100	8027455
1/2"	43/64"	1-1/64"	4-3/32"	2.73	12,000	8027655
5/8"	25/32"	1-3/16"	4-31/64"	4.43	18,100	8027755
3/4"	29/32"	1-27/64"	5-13/16"	8.27	28,300	8027855
7/8"	1-1/16"	1-1/2"	6-3/16"	11.79	34,200	8027955
1"	1-3/16"	1-7/8"	8-3/32"	15.00	47,700	8028055
1-1/4"	1-1/2"	2-1/4"	10-1/2"	41.50	72,300	8028155




ALLOY GRAB HOOK SPECIFICATIONS

Chain Size	A	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	3/8"	19/32"	2-9/16"	0.51	3,500	8029055
3/8"	1/2"	51/64"	3-1/4"	1.30	7,100	8029155
1/2"	5/8"	63/64"	4-3/16"	2.73	12,000	8029255
5/8"	25/32"	1-1/4"	5-1/4"	4.43	18,100	8029355
3/4"	7/8"	1-31/64"	6-1/4"	8.27	28,300	8029455
7/8"	1-3/32"	1-3/4"	7-1/4"	11.79	34,200	8029555
1"	1-1/4"	2"	8-3/16"	19.90	47,700	8029655
1-1/4"	1-1/2"	2-1/4"	10-1/8"	38.10	72,300	8029755



ALLOY EYE SLING HOOK SPECIFICATIONS


Chain Size	A	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	1-5/32"	63/64"	3-49/64"	1.12	3,500	8017255
3/8"	1-13/32"	1-11/32"	4-3/4"	2.03	7,100	8017455
1/2"	1-23/32"	1-43/64"	5-29/32"	3.57	12,000	8017655
5/8"	2-1/16"	2-3/64"	7-13/64"	6.39	18,100	8017755
3/4"	2-29/32"	2-7/16"	8-9/16"	11.68	28,300	8017855
7/8"	2-63/64"	2-19/32"	8-57/64"	20.94	34,200	8017955
1"	3-3/16"	2-1/16"	11-1/64"	22.60	47,700	8018055
1-1/4"	3-7/8"	2-5/16"	11-1/2"	46.00	72,300	8018155



CHAIN (Overhead Lifting)


ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 PEERLESS CHAIN)

ALLOY EYE FOUNDRY HOOK SPECIFICATIONS




Chain Size	A	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	2-31/64"	33/64"	4-23/32"	2.43	3,500	8077255
3/8"	2-63/64"	3/4"	5-3/4"	4.41	7,100	8077455
1/2"	3-1/2"	63/64"	6-27/32"	6.83	12,000	8077655
5/8"	3-63/64"	1-17/64"	8-5/64"	11.68	18,100	8077755
3/4"	4-31/64"	1-1/2"	9-1/4"	20.06	28,300	8077855
7/8"	5"	1-3/4"	10-3/8"	26.00	34,200	8077955
1"	5-1/2"	2-1/8"	11-9/16"	36.80	47,700	8078055
1-1/4"	6"	2-3/8"	12-7/8"	58.40	72,300	8078155

ALLOY EYE SELF LOCKING HOOK SPECIFICATIONS



Chain Size	A	D	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	1-5/64"	25/64"	1-1/64"	4-27/54"	2.20	3,500	8097255
3/8"	1-1/2"	33/64"	1-19/64"	5-15/16"	4.41	7,100	8097455
1/2"	1-13/16"	5/8"	1-21/32"	7-9/32"	8.42	12,000	8097655
5/8"	2-1/4"	45/64"	2-3/64"	9-3/64"	16.12	18,100	8097755

ALLOY SLING HOOK LATCH KIT SPECIFICATIONS




Chain Size	A	Weight Each (lbs.)	Part Number
9/32"	2"	0.13	8090235
3/8"	2-7/16"	0.22	8090435
1/2"	3-1/32"	0.34	8090635
5/8"	3-41/64"	0.85	8090835
3/4"	4-9/32"	1.15	8090935
7/8"	5-1/8"	1.95	8091035
1"	5-1/8"	2.50	8091135
1-1/4"	5-1/2"	3.00	8070915

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 PEERLESS CHAIN)


ALLOY CLEVIS CRADLE GRAB HOOK SPECIFICATIONS

Chain Size	R	A	B	P	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	1-31/32"	25/64"	23/64"	23/64"	0.60	3,500	8028255
3/8"	2-53/64"	33/64"	33/64"	33/64"	1.65	7,100	8028455
1/2"	3-15/32"	43/64"	43/64"	5/8"	2.98	12,000	8028655
5/8"	4-1/64"	25/32"	53/64"	53/64"	5.07	18,100	8028755
3/4"	4-39/64"	61/64"	61/64"	61/64"	9.04	28,300	8028855

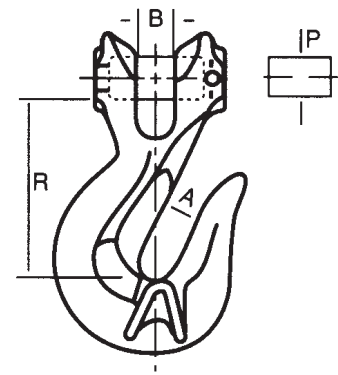


ALLOY CLEVIS GRAB HOOK SPECIFICATIONS

Chain Size	R	A	B	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	2-3/8"	13/32"	11/32"	0.50	3,500	8800255
3/8"	2-15/16"	17/32"	1/2"	1.60	7,100	8800455
1/2"	3-3/4"	11/16"	45/64"	2.60	12,000	8800655
5/8"	4-7/8"	25/32"	13/16"	5.30	18,100	8800755
3/4"	5-1/8"	7/8"	7/8"	8.20	28,300	8800855

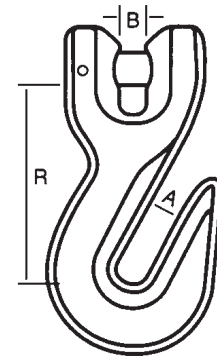

ALLOY CLEVIS SLING HOOK SPECIFICATIONS


Chain Size	R	A	B	P	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	3-25/64"	1-3/16"	11/32"	23/64"	1.19	3,500	8018255
3/8"	4-9/64"	1-13/32"	31/64"	33/64"	2.20	7,100	8018455
1/2"	5-1/16"	1-11/16"	39/64"	5/8"	4.25	12,000	8018655
5/8"	6-7/64"	2-1/16"	3/4"	53/64"	7.60	18,100	8018755
3/4"	7-1/4"	2-17/32"	7/8"	1-1/16"	13.10	28,300	8018855



CHAIN (Overhead Lifting)


ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 PEERLESS CHAIN)

ALLOY CLEVIS SELF LOCKING HOOK SPECIFICATIONS

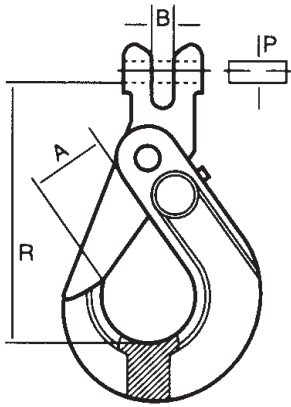


Chain Size	A	B	P	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	1-5/64"	11/32"	23/64"	3-23/32"	2.14	3,500	8098255
3/8"	1-1/2"	31/64"	33/64"	4-59/64"	4.30	7,100	8098455
1/2"	1-13/16"	39/64"	5/8"	6-3/16"	7.94	12,000	8098655
5/8"	2-1/4"	3/4"	53/64"	7-7/16"	14.33	18,100	8098855

ALLOY PLATE HOOK SPECIFICATIONS

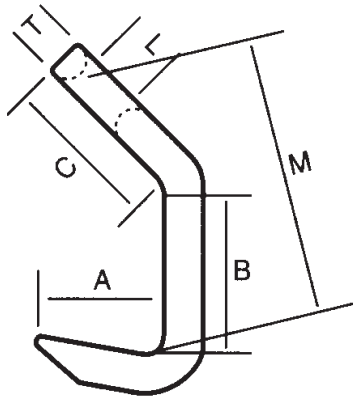

Chain Size	A	B	C	L	M	T	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	2"	1-3/4"	2-1/2"	1"	3-11/16"	5/8"	2.80	4,200	8072011
3/8"	2-5/8"	3"	4-5/16"	1-1/8"	6-3/8"	3/4"	5.70	7,400	8072111
1/2"	3-1/2"	4"	4-3/8"	1-1/2"	7-3/8"	1"	13.00	13,000	8072211
5/8"	4-3/8"	5"	5-7/16"	1-7/8"	9-1/4"	1-1/4"	26.50	20,400	8072311
3/4"	5-3/16"	6"	6-1/2"	2-1/4"	10-7/8"	1-1/2"	42.000	30,000	8072411
7/8"	6"	7"	7-5/8"	2-5/8"	13-1/16"	1-3/4"	65.00	40,000	8072511

ALLOY HAMMERLOCK SPECIFICATIONS

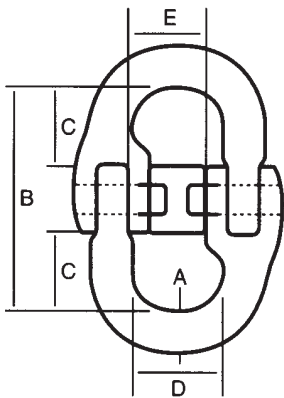


Chain Size	A	B	C	D	E	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	5/16"	1-59/64"	5/8"	25/32"	47/64"	0.22	3,500	8053155
3/8"	15/32"	3-1/32"	7/8"	1-1/16"	63/64"	0.77	7,100	8053255
1/2"	5/8"	3-11/32"	1-1/4"	1-17/64"	1-3/16"	1.87	12,000	8053355
5/8"	25/32"	4-1/16"	1-17/32"	1-17/32"	1-27/64"	2.43	18,100	8053455
3/4"	29/32"	4-9/16"	1-23/32"	1-55/64"	1-47/64"	3.75	28,300	8053555
7/8"	1-1/16"	5-15/64"	2"	2-11/64"	1-59/64"	4.85	34,200	8053655
1"	1-1/4"	6-15/16"	2-1/4"	2-27/32"	2-23/64"	9.26	47,700	8053755
1-1/4"	1-17/32"	6-13/16"	2-5/8"	2-3/4"	2-31/64"	17.20	72,300	8053855

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 PEERLESS CHAIN)


ALLOY OBLONG MASTER LINK SPECIFICATIONS

D	L	P	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
1/2"	2-3/4"	4-23/32"	1.06	6,100	8051255
3/4"	3-35/64"	6-19/64"	2.89	12,300	8051355
1"	4-21/64"	7-7/8"	6.09	20,800	8051455
1-1/4"	5-1/8"	9-1/16"	11.31	31,300	8051555
1-1/2"	5-29/32"	11-1/64"	18.05	49,000	8051655
1-3/4"	7-3/32"	13-25/64"	30.80	73,500	8051755
2"	7-31/64"	13-25/32"	41.39	102,600	8051855
2-1/4"	7-7/8"	15-3/4"	58.23	125,200	8051955

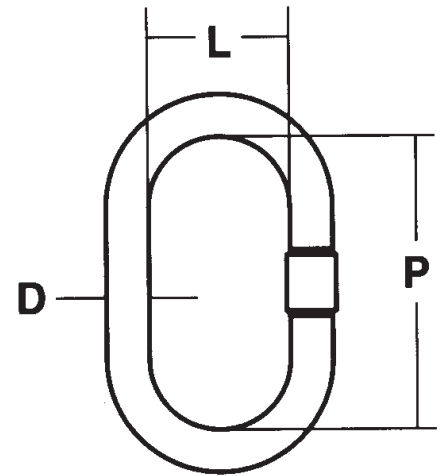

ALLOY OBLONG MASTER LINK SUB-ASSEMBLY SPECIFICATIONS


D1	L1	P1	D2	L2	P2	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
3/4"	3-3/4"	6-19/64"	33/64"	2-3/4"	4-23/32"	4.19	12,300	8052155
1"	4-21/64"	7-7/8"	25/32"	3-35/64"	6-19/64"	10.69	20,800	8052255
1-1/4"	5-1/8"	9-1/16"	1-1/64"	4-21/64"	7-7/8"	20.28	31,300	8052355
1-1/2"	5-29/32"	11-1/64"	1-3/16"	5-1/8"	9-1/16"	32.41	49,000	8052455
1-3/4"	7-31/64"	13-25/32"	1-17/64"	5-1/8"	9-1/16"	58.64	73,500	8052555
2"	7-7/8"	15-3/4"	1-1/2"	5-29/32"	11-1/64"	85.98	88,900	8052655
2-1/4"	7-3/4"	15-1/2"	1-3/4"	3-7/8"	6-7/8"	83.90	123,900	8052755
2-3/4"	8-5/8"	17-1/2"	2"	4-1/2"	7-7/8"	127.30	187,800	8052855

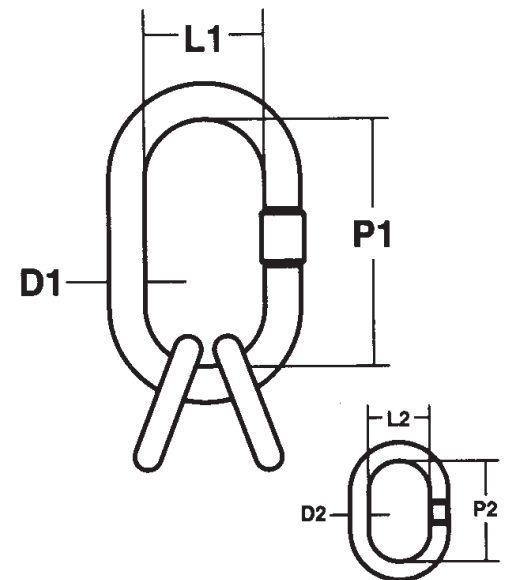

CHAIN (Overhead Lifting)


ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 CM CHAIN)

ALLOY EYE SLING HOOK SPECIFICATIONS




Chain Size	A	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
9/32"	1.19"	0.75"	3.75"	1.1	3,500	458722
3/8"	1.44"	.94"	4.78"	1.9	7,100	458725
1/2"	1.78"	1.13"	5.69"	4.5	12,000	458728
5/8"	2.03"	1.31"	6.50"	7.3	18,100	458729
3/4"	2.50"	1.50"	7.81"	11.4	28,300	458730
7/8"	2.78"	1.69"	8.75"	18.1	34,200	458732
1"	3.13"	1.88"	9.88"	22.6	47,700	458733
1-1/4"	3.88"	2.31"	11.50"	36.0	72,300	458735

ALLOY EYE GRAB HOOK SPECIFICATIONS



Chain Size	A	O	R	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
1/4"	3/8"	17/32"	2-1/32"	0.44	3,500	CM204A
5/16"	7/16"	5/8"	2-13/32"	0.69	4,500	CM205A
3/8"	1/2"	25/32"	2-3/4"	1.00	7,100	CM206A
1/2"	21/32"	15/16"	3-9/16"	2.31	12,000	CM208A
5/8"	25/32"	1-1/16"	4-9/16"	4.00	18,100	CM210A

ALLOY CLEVIS GRAB HOOK SPECIFICATIONS




Chain Size	A	B	C	D	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
1/4"	21/64"	5/16"	3/8"	1-7/8"	0.38	3,500	CM804A
5/16"	25/64"	3/8"	7/16"	2-3/8"	0.62	4,500	CM805A
3/8"	1/2"	29/64"	1/2"	2-5/8"	0.96	7,100	CM806A
1/2"	19/32"	19/32"	21/32"	3-5/16"	2.02	12,000	CM808A
5/8"	3/4"	3/4"	25/32"	3-15/16"	3.75	18,100	CM810A

CHAIN (Overhead Lifting)

ALLOY STEEL CHAIN ACCESSORIES (GRADE 80 CM CHAIN)

ALLOY OBLONG MASTER LINK SPECIFICATIONS

D	L	P	Weight Each (lbs.)	Working Load Limit (lbs.)	Part Number
13/32"	1-1/2"	3"	0.33	3,600	554931
1/2"	2-1/2"	5"	0.8	6,100	554932
3/4"	2-3/4"	5-1/2"	2.1	12,300	554935
1"	3-1/2"	7"	4.6	20,800	554938
1-1/4"	4-3/8"	8-3/4"	9.2	31,300	554940
1-1/2"	5-1/4"	10-1/2"	15.7	49,000	554943
1-3/4"	6"	12"	24.5	73,500	554946
2"	7"	14"	37.3	88,900	554949
2-1/4"	8"	16"	54.0	125,200	554951
2-3/4"	9"	16"	84.8	187,800	554957

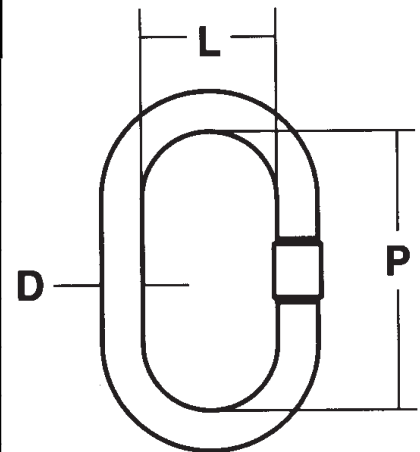

ALLOY OBLONG MASTER LINK SUB-ASSEMBLY SPECIFICATIONS

D 1	L 1	P 1	D 2	L 2	P 2	Weight Each (lbs.)	To be used with chain size (in)	Part Number
1/2"	2-1/2"	5"	11/32"	5/8"	1-1/8"	1	7/32"	554974
3/4"	2-3/4"	5-1/2"	15/32"	7/8"	1-9/16"	2.60	9/32"	554975
1"	3-1/2"	7"	21/32"	1-1/4"	2-1/4"	6.1	3/8"	554976
1-1/4"	4-3/8"	8-3/4"	29/32"	1-3/4"	3-1/8"	13.3	1/2"	554977
1-1/2"	5-1/4"	10-1/2"	1-5/32"	2-1/4"	4"	24.3	5/8"	554978
1-3/4"	6"	12"	1-9/32"	2-3/8"	4-3/8"	36.1	3/4"	554979
2"	7"	14"	1-17/32"	2-3/4"	5-1/4"	57.40	7/8"	554980
2-1/4"	8"	16"	1-25/32"	3"	6"	83.90	1"	554981
2-3/4"	9"	16"	2-1/32"	3-1/2"	7"	129.70	1-1/4"	554983

