

#### THE MOST TRUSTED NAME IN SLINGS SINCE 1955

WWW.LIFTEX.COM

800-299-0900

# **Sling Protection**

#### WEAR PADS

Wear pads give a sling extra protection where it wears the most. They can be furnished in numerous materials, including leather, buffer web, polyester, felt, PVC, among others. Whether you are trying to protect your sling against wear and/or oil and dirt, Liftex<sup>®</sup> will offer you protection that best fits your needs.

#### **SLIDING SLEEVES**

Sliding sleeves are ideal for handling material with sharp edges because the sleeve doesn't move when the sling stretches. Sleeves cover both sides of the sling and can be moved on the sling to where it is needed. Sleeves are available in many materials and in any length.

#### **FLAT & ROUND QUICK SLEEVES**

These heavy polyester or nylon sling covers have velcro closures for quick and easy protection of slings and/or load from damage.

\* NOTE: Unless specifically indicated on tags, Wear Pads and Sleeves do not provide cut protection. For pads that provide cut protection see Pro-Corner® Page 51



SUPER FELT WEAR PAD



**PVC WEAR PAD** 





**BUFFER WEB WEAR PAD** 

Material Choices: Buffer Web / Nylon / Polyester / Leather / Super Pad See page 27 for all eye treatment options



#### **BUFFER WEB EDGE WRAP**





**ROUND QUICK SLEEVE** 



**BUFFER WEB SLIDING SLEEVE** 



LEATHER SLIDING SLEEVE



FULLY WRAPPED EYE



**BUFFER WEB EYE BUFFER** 




# Introducing "PRO-CORNER" Premium Cut Protection Pad

### **Cut Protection is different from Abrasion Protection.** SUFFICIENT PRESSURE + EDGE CONTACT = A CUT SLING — EVERY TIME! **"Pro-Corner" prevents the contact — to prevent the cut.**

### **"PRO-CORNER" FEATURES & BENEFITS**

- Tested to 25,000 lbs/inch of sling width maximum protection at maximum capacity
- Designed with adjustable straps for easy placement, adjustment and recovery

"Pro-Corner" is specifically designed for use with 90° edge loads. Using a **Pro-Corner** pad creates a gap between the edge and pad/sling. Eliminate the contact to eliminate the potential for cut.

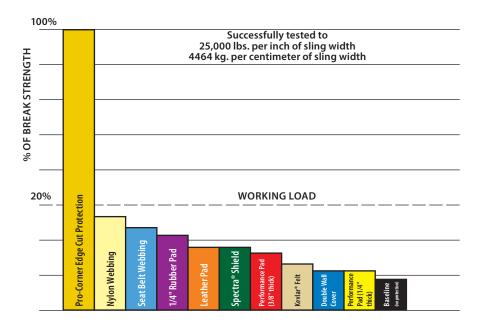

Simulated load edge

Liftex <sup>®</sup> Part No.	Sling Width	Pro-Corner Width	Pro-Corner Weight (lbs)
PC02	1" & 2"	4"	1.00
PC03	3"	5"	1.25
PC04	4"	6"	1.50
PC05	5"	8"	2.00
PC06	6"	8"	2.00
PC08	8"	10"	2.50
PC10	10"	12"	3.00

NOTE: All ProCorner pads are approximately 9 inches in length unless otherwise specified.

For more information or to order contact

TEL: 800-**299-0900** E-mail: sales@liftex.com Website: www.liftex.com