





Endless (EN - TYPE V)

“EN” Web slings are a continuous loop formed by joining ends of the webbing together with a load-bearing splice. They are extremely versatile as the design allows for rotation of bearing points, avoiding one constant bearing point and thereby increasing useful life. They are suitable for use with all three hitches: vertical, basket and choker.

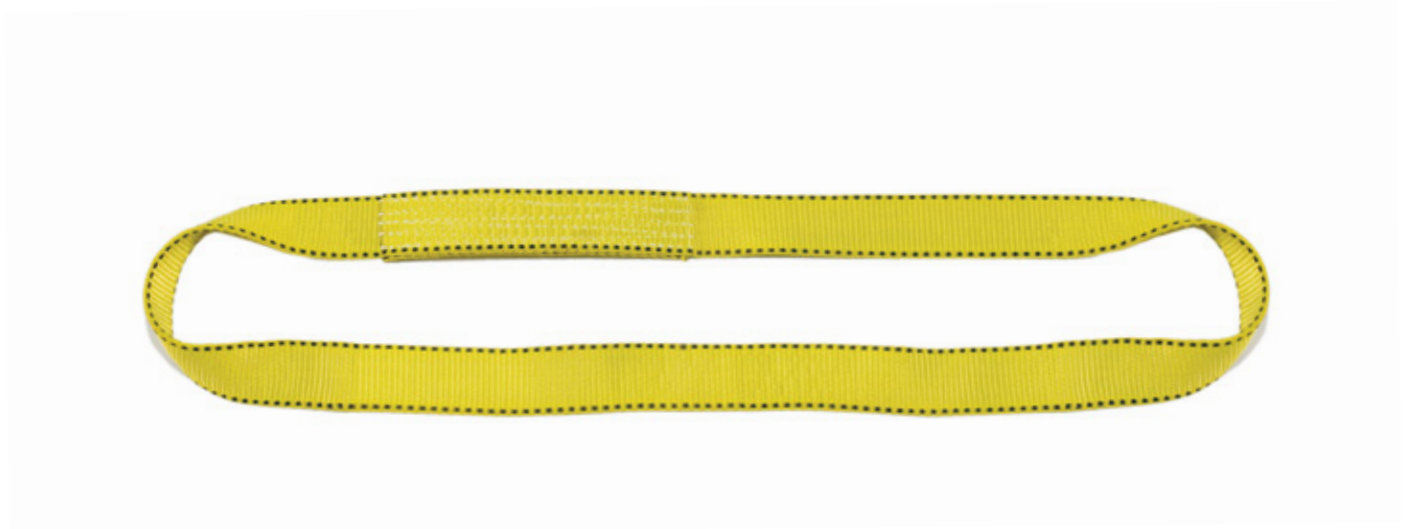

HOW TO ORDER INSTRUCTIONS

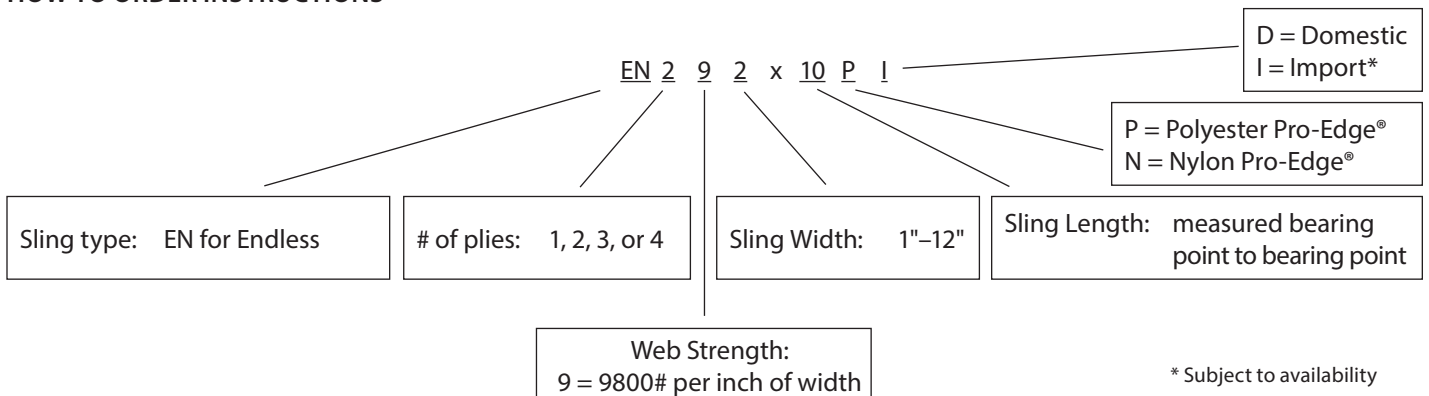

WARNING

PROTECT SLINGS FROM CUTTING: Failure to protect sling from cutting may result in damage, injury or death. Contact us to discuss sling protection options.



ENDLESS WEB SLING CAPACITY CHART


	Part Number	Web Width (inches)	Rated Capacity (lbs.)			Approximate Sling Weight (lbs.)		
			Vertical	Choker	Vertical Basket	Min. Standard Length (ft)	Base	Adder/ft.
One Ply	EN191	1	3,200	2,500	6,400	3	.40	.12
	EN192	2	6,400	5,000	12,800	3	.80	.25
	EN193	3	8,600	6,900	17,200	3	1.30	.35
	EN194	4	11,500	9,200	23,000	3	1.70	.48
	EN196	6	16,300	13,000	32,600	3	2.50	.70
	EN198	8	19,200	15,400	38,400	3	3.40	.95
	EN1910	10	22,400	17,900	44,800	3	4.20	1.20
	EN1912	12	26,900	21,500	53,800	3	5.0	1.40
Two Ply	EN291	1	6,200	4,900	12,400	3	.80	.25
	EN292	2	12,200	9,800	24,400	3	1.60	.50
	EN293	3	16,300	13,000	32,600	3	2.50	.75
	EN294	4	20,700	16,500	41,400	3	3.30	1.10
	EN296	6	28,600	23,000	57,200	3	4.90	1.50
	EN298	8	30,700	24,500	61,400	3	6.60	2.00
	EN2910	10	33,600	26,800	67,200	3	8.20	2.50
	EN2912	12	37,600	30,000	75,200	3	9.90	3.00
Three Ply	EN391	1	8,000	6,400	16,000	3	1.20	.38
	EN392	2	16,000	12,800	32,000	3	2.40	.75
	EN393	3	21,500	17,200	43,000	3	3.60	1.10
	EN394	4	28,700	23,000	57,400	3	4.80	1.50
	EN396	6	40,700	32,500	81,400	3	7.20	2.30
	EN398	8	46,000	36,800	92,000	3	9.60	3.00
	EN3910	10	51,500	41,200	103,000	3	12.00	3.80
	EN3912	12	59,200	47,300	118,400	3	14.00	4.50
Four Ply	EN491	1	10,000	8,000	20,000	3	1.60	.52
	EN492	2	19,800	15,800	39,600	3	3.20	1.00
	EN493	3	26,700	21,300	53,400	3	4.90	1.60
	EN494	4	35,600	28,400	71,200	3	6.50	2.10
	EN496	6	50,500	40,400	101,000	3	9.70	3.10
	EN498	8	57,600	46,000	115,200	3	13.00	4.20
	EN4910	10	67,200	53,700	134,400	3	16.00	5.20
	EN4912	12	80,700	64,500	161,400	3	19.00	6.20

* Before ordering slings that are going to be used in a chemically active environment, contact Liftex® Customer Service, to recommend the right sling for the right usage.

Chemically Active Environments can affect the strength of webbing slings in varying degrees, ranging from little to total degradation.

Available in:





WARNING

SLING FAILURE CAN CAUSE
DEATH OR INJURY
 SLING FAILURE RESULTS FROM
 MISUSE, DAMAGE, AND
 EXCESSIVE WEAR
 ADHERE TO INDUSTRY
 STANDARDS & REGULATIONS