


WIRE ROPE (Slings)

SWAGED WIRE ROPE SLING (6X25 & 6X37 EIP RRL IWRC)


SINGLE LEG SLING SPECIFICATIONS

Rope Dia.	Working Load Limit (lbs.)			Eye Dim.		Thimble Eye		Hook		
	Vertical	Choker Hitch	Basket Hitch	A	B	C	D	E	F	Working Load (Ton)
1/4"	1,120	820	2,200	6"	3"	1-5/8"	7/8"	15/16"	3-7/32"	3/4
5/16"	1,740	1,280	3,400	6"	3"	1-7/8"	1-1/16"	1-1/32"	3-21/32"	1
3/8"	2,400	1,840	4,800	6"	3"	2-1/8"	1-1/8"	1-1/16"	4-3/32"	1-1/2
7/16"	3,400	2,400	6,800	6"	3"	2-1/4"	1-1/4"	1-7/32"	4-11/16"	2
1/2"	4,400	3,200	8,800	8"	4"	2-3/4"	1-1/2"	1-1/2"	5-3/4"	3
9/16"	5,600	4,000	11,200	10"	5"	2-3/4"	1-1/2"	1-1/2"	5-3/4"	3
5/8"	6,800	5,000	13,600	10"	5"	3-1/4"	1-3/4"	1-7/8"	7-3/8"	5
3/4"	9,800	7,200	19,600	10"	5"	3-3/4"	2"	1-7/8"	7-3/8"	5
7/8"	13,200	9,600	26,000	12"	6"	4-1/4"	2-1/4"	2-1/4"	9-1/16"	7-1/2
1"	17,000	12,600	34,000	16"	8"	4-1/2"	2-1/2"	2-1/2"	10-1/16"	10
1-1/8"	20,000	15,800	40,000	18"	9"	5-1/8"	2-7/8"	2-1/2"	10-1/16"	10
1-1/4"	26,000	19,400	52,000	18"	9"	5-1/8"	2-7/8"	3-3/8"	12-1/2"	15

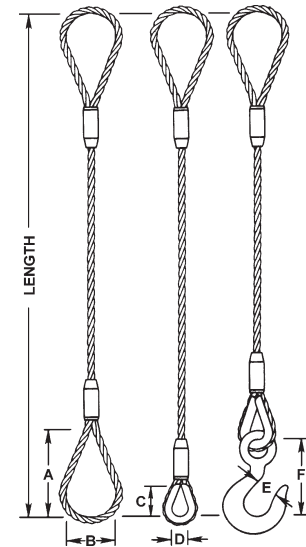

TWO LEG SLING SPECIFICATIONS


Rope Dia.	Working Load Limit (lbs.)			Oblong Ring			Hook		
	30°	60°	90°	D	L	W	E	F	Working Load (Ton)
1/4"	2,200	1,940	1,580	1/2"	4-23/32"	2-3/4"	15/16"	3-7/32"	3/4
5/16"	3,400	3,000	2,400	1/2"	4-23/32"	2-3/4"	1-1/32"	3-21/32"	1
3/8"	4,600	4,200	3,400	1/2"	4-23/32"	2-3/4"	1-1/16"	4-3/32"	1-1/2
7/16"	6,600	5,800	4,800	3/4"	6-19/64"	3-35/64"	1-7/32"	4-11/16"	2
1/2"	8,600	7,600	6,200	3/4"	6-19/64"	3-35/64"	1-1/2"	5-3/4"	3
9/16"	10,800	9,600	8,000	1"	7-7/8"	4-21/64"	1-1/2"	5-3/4"	3
5/8"	13,200	11,800	9,600	1"	7-7/8"	4-21/64"	1-7/8"	7-3/8"	5
3/4"	19,000	17,000	13,800	1"	7-7/8"	4-21/64"	1-7/8"	7-3/8"	5
7/8"	26,000	22,000	18,600	1-1/4"	9-1/16"	5-1/8"	2-1/4"	9-1/16"	7-1/2
1"	32,000	30,000	24,000	1-1/4"	9-1/16"	5-1/8"	2-1/2"	10-1/16"	10
1-1/8"	38,000	34,000	28,000	1-1/2"	11-1/64"	5-29/32"	2-1/2"	10-1/16"	10
1-1/4"	50,000	46,000	36,000	1-3/4"	13-25/64"	7-3/32"	3-3/8"	12-1/2"	15

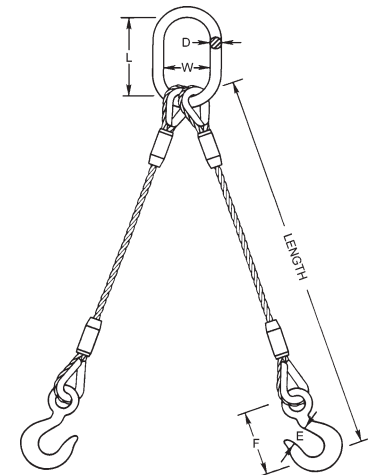

WIRE ROPE (Slings)


SWAGED WIRE ROPE SLING (6X25 & 6X37 EIP RRL IWRC)

THREE LEG SLING SPECIFICATIONS

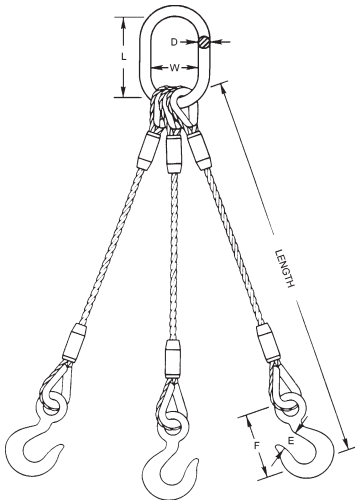

Rope Dia.	Working Load Limit (lbs.)			Oblong Ring			Hook		
	30°	60°	90°	D	L	W	E	F	Working Load (Ton)
1/4"	3,200	2,800	2,400	3/4"	6-19/64"	3-35/64"	15/16"	3-7/32"	3/4
5/16"	5,000	4,600	3,600	3/4"	6-19/64"	3-35/64"	1-1/32"	3-21/32"	1
3/8"	7,000	6,200	5,000	1"	7-7/8"	4-21/64"	1-1/16"	4-3/32"	1-1/2
7/16"	9,800	8,800	7,200	1"	7-7/8"	4-21/64"	1-7/32"	4-11/16"	2
1/2"	12,800	11,400	9,400	1"	7-7/8"	4-21/64"	1-1/2"	5-3/4"	3
9/16"	16,200	14,600	11,800	1-1/4"	9-1/16"	5-1/8"	1-1/2"	5-3/4"	3
5/8"	19,800	17,600	14,400	1-1/4"	9-1/16"	5-1/8"	1-7/8"	7-3/8"	5
3/4"	28,000	26,000	20,000	1-3/4"	13-25/64"	7-3/32"	1-7/8"	7-3/8"	5
7/8"	38,000	34,000	28,000	1-3/4"	13-25/64"	7-3/32"	2-1/4"	9-1/16"	7-1/2
1"	50,000	44,000	36,000	1-3/4"	13-25/64"	7-3/32"	2-1/2"	10-1/16"	10
1-1/8"	58,000	52,000	42,000	2"	13-25/32"	7-31/64"	2-1/2"	10-1/16"	10
1-1/4"	76,000	68,000	56,000	2-1/4"	15-3/4"	7-7/8"	3-3/8"	12-1/2"	15

FOUR LEG SLING SPECIFICATIONS

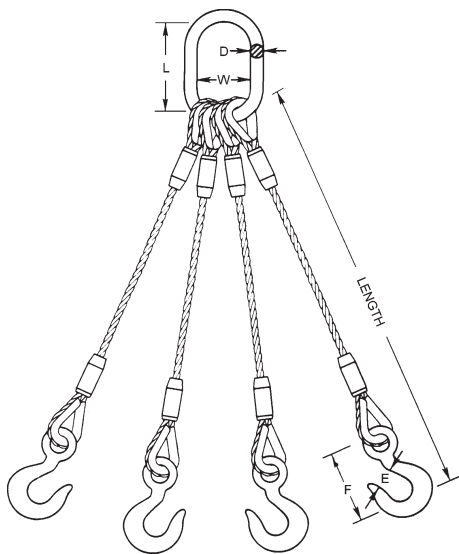

Rope Dia.	Working Load Limit (lbs.)			Oblong Ring			Hook		
	30°	60°	90°	D	L	W	E	F	Working Load (Ton)
1/4"	4,400	3,800	3,200	3/4"	6-19/64"	3-35/64"	15/16"	3-7/32"	3/4
5/16"	6,800	6,000	5,000	3/4"	6-19/64"	3-35/64"	1-1/32"	3-21/32"	1
3/8"	9,200	8,400	6,800	1"	7-7/8"	4-21/64"	1-1/16"	4-3/32"	1-1/2
7/16"	13,200	11,800	9,600	1"	7-7/8"	4-21/64"	1-7/32"	4-11/16"	2
1/2"	17,000	15,200	12,400	1-1/4"	9-1/16"	5-1/8"	1-1/2"	5-3/4"	3
9/16"	22,000	19,400	15,800	1-1/2"	11-1/64"	5-29/32"	1-1/2"	5-3/4"	3
5/8"	26,000	24,000	19,200	1-1/2"	11-1/64"	5-29/32"	1-7/8"	7-3/8"	5
3/4"	38,000	34,000	28,000	1-3/4"	13-25/64"	7-3/32"	1-7/8"	7-3/8"	5
7/8"	52,000	46,000	38,000	1-3/4"	13-25/64"	7-3/32"	2-1/4"	9-1/16"	7-1/2
1"	66,000	58,000	48,000	2"	13-25/32"	7-31/64"	2-1/2"	10-1/16"	10
1-1/8"	78,000	70,000	56,000	2-1/4"	15-3/4"	7-7/8"	2-1/2"	10-1/16"	10
1-1/4"	100,000	90,000	74,000	2-1/4"	15-3/4"	7-7/8"	3-3/8"	12-1/2"	15