


TROLLEYS

PRODUCT DETAILS

- Manufactured in South Korea
- Load tested to 150% of rated capacity
- Meets all applicable ANSI/ASME standards
- Anti-drop lugs included
- Sealed ball-bearing wheels

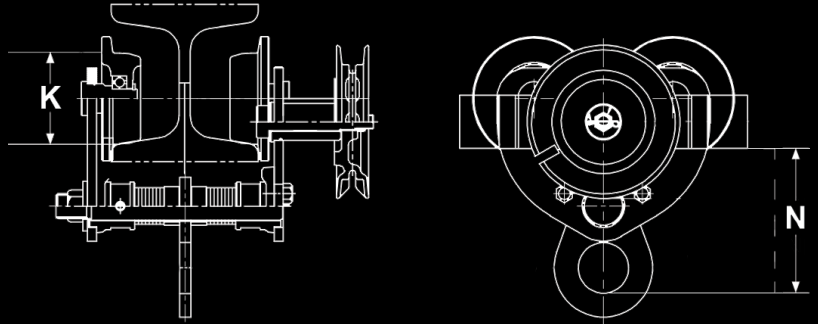

PLAIN TROLLEY

MODEL	PTR050	PTR100	PTR200	PTR300	PTR500	PTR750*	PTR1000*	PTR1500*	PTR2000*
SIZE (TONS)†	1/2	1	2	3	5	7 1/2	10	15	20
CAPACITY (LBS)	1,100	2,200	4,400	6,600	11,000	16,500	22,000	33,000	44,000
FITS FLANGE WIDTH (IN)**	3-8	3-8	4-8	4-8	5-8	5-8	5-8	6 - 12	6 - 12
MIN RADIUS CURVE (IN)	48	56	67	83	114	122	122	141	157
HEADROOM N (IN)	5.1	5.3	6.9	7.8	9.2	11.3	11.3	14.8	18.1
NET WEIGHT (LBS)	17	26	44	68	106	150	161	331	593

GEARED TROLLEY

MODEL	GTR100	GTR200	GTR300	GTR500	GTR750*	GTR1000*	GTR1500*	GTR2000*
SIZE (TONS)†	1	2	3	5	7.5	10	15	20
CAPACITY (LBS)	2,200	4,400	6,600	11,000	16,500	22,000	33,000	44,000
FITS FLANGE WIDTH (IN)**	3-8	4-8	4-8	5-8	5-8	5-8	6 - 12	6 - 12
MIN RADIUS CURVE (IN)	56	67	83	114	122	122	141	157
HEADROOM N (IN)	5.3	6.9	7.8	9.2	11.3	11.3	14.8	18.1
NET WEIGHT (LBS)	37	56	79	117	161	172	353	617

Standard hand chain drop length of 10'

*Two pin design **Wider flange versions available
†Metric ton rated

PLAIN TROLLEY



GEARED TROLLEY



LUG MOUNTING



Lug hoist mount for hand chain hoists to minimize total headroom